


f=50mm F1.4

SPECIFICATIONS		1:1.4 50mm AS UMC									
APERTURE RANGE		F1.4 ~ 22									
OPTICAL CONSTRUCTION		9 ELEMENTS IN 6 GROUPS (1 ASPHERICAL & 1 HYBRID LENS)									
MINIMUM FOCUSING DISTANCE		0.45m(1.47ft)									
FILTER SIZE		Φ77mm									
MAXIMUM DIAMETER		Φ81.6mm									
MOUNT		CANON EOS	NIKON	PENTAX K	SONY α	CANON M	FUJIFILM X	SAMSUNG NX	SONY E	FOUR-THIRDS	MICRO FOUR-THIRDS
ANGLE OF VIEW	35mm	46.2°	46.2°	46.2°	46.2°	-	-	-	-	-	-
	APS-C	29.0°	30.8°	30.8°	30.8°	29.0°	30.8°	30.8°	30.8°	-	-
	FOUR-THIRDS 4/3"	-	-	-	-	-	-	-	-	23.6°	23.6°
LENGTH		74.7mm	72.2mm	73.2mm	74.2mm	100.6mm	101.0mm	93.2mm	100.7mm	80.0mm	99.5mm
WEIGHT		535g	520g	510g	530g	600g	605g	555g	565g	545g	555g

Drawing

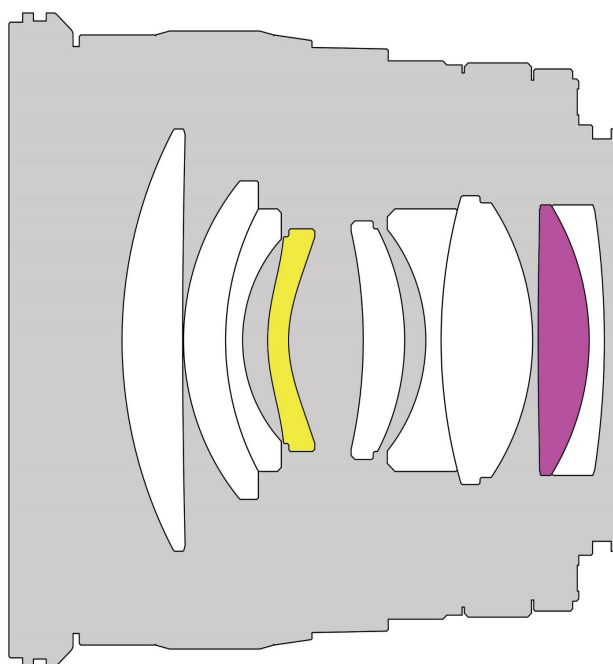

ASP

H-ASP

SAMYANG

Samyang Optics R&D Center
Copyright © 2014-0